


PRODUCT DIMENSION/ SPECIFICATION

Model: B42





INTRUST

尺寸测量参考图 伸缩比: 1:0.22+0.4

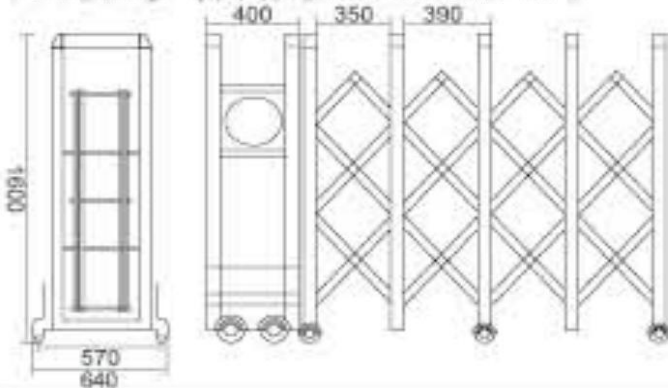

材料尺寸:

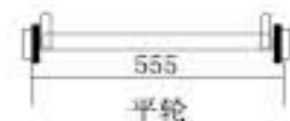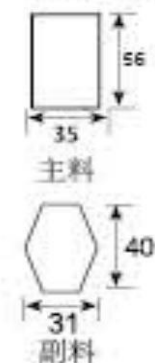

RETRACTABLE GATE INTELLIGENT MOTOR



WATERPROOF LED DISPLAY





Parameter and Specification of InTrust Driveway Gate

- Materials: Aluminum
- Power Voltage: AC220V±10% / AC110V±10%
- Power Consumption: 300W / 370W / 740W (As per motor Selection)
- Power Current: 1.8A / 3.5A
- Motor Overheat Protection: 120°C
- Motor Output Speed: n=45rpm
- Remote Frequency: 433Hz
- Remote Control Distance: 50m
- Working Temperature: -35°C—+55°C
- Height: 1800MM (can be adjustable as per requirement)
- Width: 700MM/Wheel base: 650MM/Body density: 350MM
- Main Material: 56mm*35mm*0.8mm
- Cross Material: 40mm*31mm*0.8mm
- Automatic Control / Manual Control: Both
- Surface Treatment: Powder Coated
- Sliding Speed: 18m/min
- Language: English

Technical data of Collapsible Gate/Door:

- ✓ Industrial aluminum material: high hardness and tensile strength
- ✓ Motor overheat protection: auto power off if the motor up to 120°C and re-working once temperature turn low.
- ✓ Wheels: made by casting aluminum and special rubber, 2000000 times tested without abrasion.
- ✓ Anti-wind hooks: prevent the gate overturn by strong wind.
- ✓ Anti-bumping sensor: any obstacle during closing process, the gate will auto stop at 30-40cm away to avoid collision.
- ✓ Anti-climb-over alarm: alarming once anybody climbing over gate.
- ✓ Caution light: it will twinkle during gate sliding.
- ✓ Speed clutch: rotate the clutch to switch electric control or manual control.
- ✓ Wireless remote control: with maximum 50m effective distance.
- ✓ Gate sliding speed: around 22M/min.
- ✓ Standard equipped 8bits static screen or optional 500bits rolling screen.
- ✓ Gate Length, Height, Color can be customized.
- ✓ DIY installation, easy operation and maintenance.

CUSTOMERSFEEDBACK

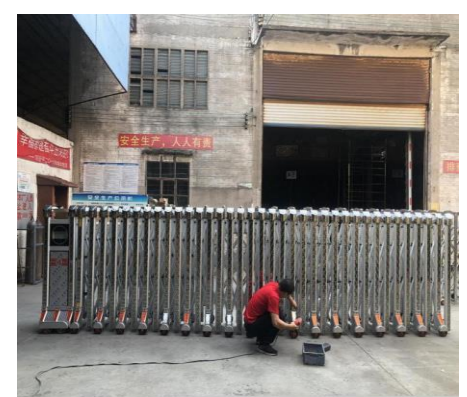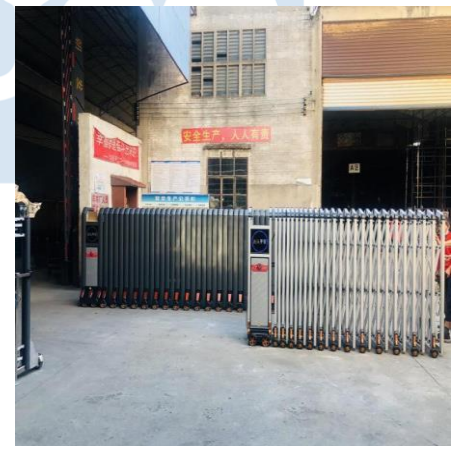

CUSTOMERSFEEDBACK

